



## 4 Channel Wireless Switching System

An ideal and simple solution, enabling remote switching ideal for external use.

The MWM-4CHPS is a wireless switching system that can be used to control multiple lighting circuits, garden pumps and other electrical devices. It can be controlled using multiple receivers from various remote control handsets and switch plates throughout a property.



LED Compatibility



Wireless Switching



Frequency Range 250m




IP56 Weatherproof

| Item Code    | Description  |
|--------------|--|
| MWM-4CHPSKIT | 4 Channel radio receiver / power switch Kit<br>In the Kit: 4 Channel wireless system, 2 button wireless wall plate, 4 button IR remote |

## System Features:

- Control up to 4 channels
- Enable remote switching to open automatic gates and garage doors.
- Suitable for year round outdoor use.
- Ideal for garden lighting and water feature pumps.
- 2 operating modes: on/off and timed.
- Control your existing wiring system or integrate with Hamilton's lighting control system.
- Compatible with all Hamilton Air accessories.
- Up to 113 controllers can be programmed to control this device.
- Connect and control LED bulb lighting circuits.
- Supplied with an integral aerial.
- Operating range 250m


## Application:

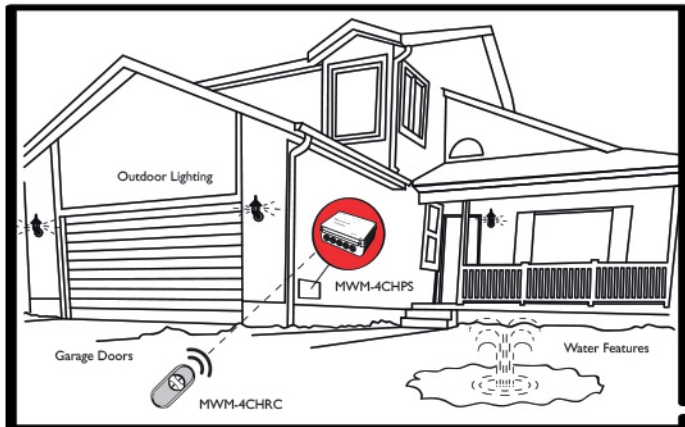

## Technical Information:

|  |   |
|--|---|
| <b>Ratings:</b>  | 230V AC 50Hz  |
| <b>Power Output:</b>                                   | 4 circuits each rated at 5 amps<br>1250 watts per circuit<br>Total pack load must not exceed 4000 watts |
| <b>Power Consumption:</b>                              | 5VA   |
| <b>No. of Channels:</b>                                | 4   |
| <b>Radio Transmission Encoded Operating Frequency:</b> | 868,32 MHz  |
| <b>Casing Protection Degree:</b>                       | Weather proof IP56 rated enclosure (EN 60529)   |
| <b>Dimensions:</b>                                     | 196 x 149 x 90mm  |
| <b>Standard / Approval:</b>                            | EN 60950  |

MWM-4CHPS is a mains powered radio receiver, it has four channels that will switch on/off devices such as; multiple lighting circuits, garage doors and water feature pumps. Be in control with an IR remote and have the ability to turn on lights and open the garage on approach to the property.



**YouTube** Watch the MWM-4CHPS installation video, available on YouTube

Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter information, designs and dimensions without prior notice. All products listed conform to current British or European standards and the product information is correct at the time of going to press. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding.

BRO\_MWM-4CHPS\_RevD\_0119



ISO 9001:2015 | Cert No. FM11238