

SPECIFICATION



Tatton Slimline 10W & 20W

LED Floodlight



Beam Angle
110°



Input
200-240V



Life Hours
25,000



Dimmable
No



Colour Temperature
6000K

Without PIR (IP65)	TA1-10C	TA1-20C
With PIR (IP44)	TA1-10CP	TA1-20CP
Wattage	10W	20W
Input Voltage	200-240V	200-240V
Beam Angle	110°	110°
Life Expectancy	25,000	25,000
Colour Temperature	6000K	6000K
Output Lumens	775lm	1525lm
Dimmable	No	No
Switch Time	12500	12500
Instant Light	Yes	Yes
CRI	>80	>80
Dimensions without PIR (mm)	104 x 125 x 27	125 x 152 x 28
Dimensions with PIR (mm)	104 x 165 x 55	125 x 189 x 55

Key Features

- PIR with 4th wire override or slave function
- Angled bracket for easy installation
- Supplied with 1m cable
- 2 year warranty


CRI >80 **IP 65** **IP 44**

Please Note: Product specifications are subject to change without notice. Product supplied may differ slightly in appearance from images shown on this website. Diamond LED Lighting reserve the right to update product specifications

Tel: 01260 292 640 | Fax: 01260 279 116 | E-mail: sales@diamondledlighting.co.uk | Web: www.diamondledlighting.co.uk




Tatton Floodlight Instructions



IMPORTANT INSTALLATION INFORMATION This product must be installed in accordance with the latest edition of Building Regulations and carried out by a qualified electrician in accordance with the latest IEE Wiring Regulations. Before commencing any installation or maintenance work, ensure that the mains supply is switched off and the appropriate MCB or fuse is isolated.

Caution, risk of electric shock.

MAINS WIRING Cable colours are shown opposite.




The Tatton is a Class I product and must be earthed. Available with or without PIR Detector with black body. PIR detection distance: 8m max Mounting height: 2-4m. Time delay 10 sec. to 10 min. Adjustable sensitivity and day/night operation. PIR versions have a fourth black wire providing manual over-ride, connection diagram below.

CE Approved. 220-240VAC Supply. IP65 rated without PIR, IP44 with PIR Available in 10, 20,30 & 50Watt, LED—6000K. (Excludes 10 watt with PIR)

PLEASE NOTE

Slaving off the PIR black 4th wire is not permitted unless connected via an auxiliary contactor.

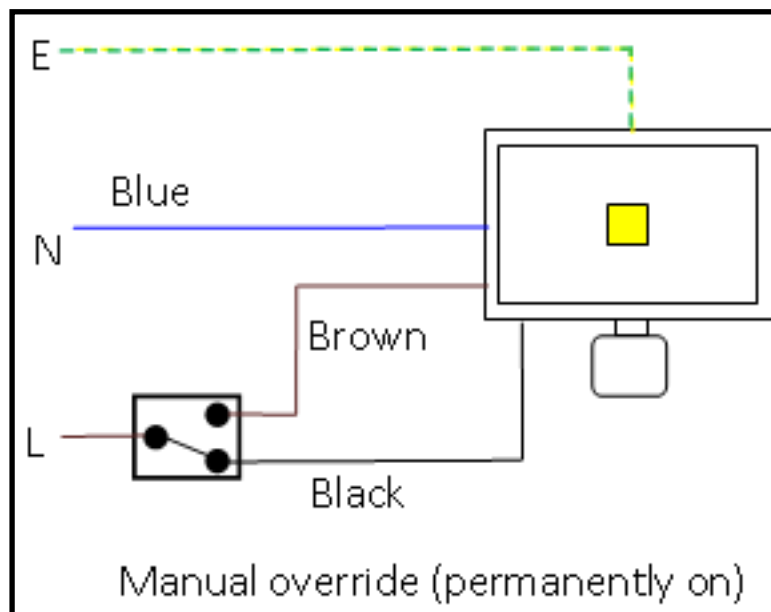

SPECIFICATION



Tatton Slimline 30W & 50W

LED Floodlight



Without PIR	TA1-30C	TA1-50C
With PIR	TA1-30CP	TA1-50CP
Wattage	30W	50W
Output Lumens	2500lm	4100lm
Switch Time	12500	12500
Instant Light	Yes	Yes
Dimensions without PIR (mm)	168 x 209 x 27	200 x 237 x 36
Dimensions with PIR (mm)	168 X 252 X 54	200 X 287 X 57

Key Features

- PIR with 4th wire override or slave function
- IP65 PIR
- Angled bracket for easy installation
- Supplied with 1m cable
- 2 year warranty

CRI >80 IP 65



Beam Angle
110°



Input
200-240V



Life Hours
25,000



Dimmable
No



Colour Temperature
6500K

Please Note: Product specifications are subject to change without notice. Product supplied may differ slightly in appearance from images shown on this website. Diamond LED Lighting reserve the right to update product specifications.

Tel: 01260 292 640 | Fax: 01260 279 116 | E-mail: sales@diamondledlighting.co.uk | Web: www.diamondledlighting.co.uk