

HARLED DUO

A fully fire rated downlight, tested with I-joint ceilings. It is switchable 3000K or 4000K via a dip switch at the front (behind bezel) and has an IP65 front. Harled Duo comes with an integrated dimmable driver and interchangeable bezels as optional.



DUO
COLOUR

FIRE
RATED

IP65


DIM

TP(a)
RATED

FLICKER
FREE

5YR
WARRANTY

Light Distribution

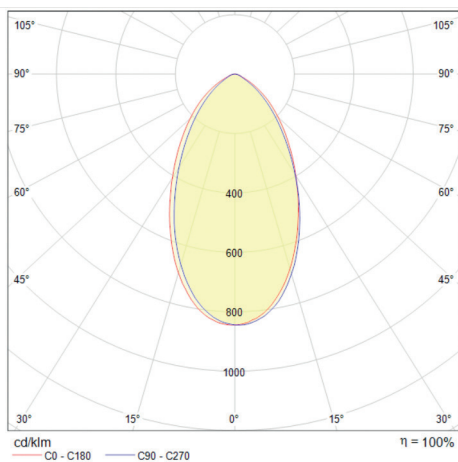

KEY FEATURES

- 30/60/90 min fire rated
- Tested with I-joint ceilings
- TP(a) rated polycarbonate diffuser
- High ingress protection (IP65 fascia, IP54 back)
- Switchable colour temperature 3000K or 4000K
- Easy to switch colour temperature via a switch behind the bezel
- 6W delivering 602lumens
- Quick push fit connector block
- Integrated dimmable driver
- White bezel as standard
- Polished chrome, brushed chrome and black bezels options

Harled Duo Options


Colour Temperature (switchable via switch behind bezel)



Bezel



Matte White
(Standard)



Chrome
(Option)



Brushed Chrome
(Option)




Black
(Option)

Order Code: HAR-DUO-6CCT

Please get in touch for additional bezel order details.

Dimensions (mm)

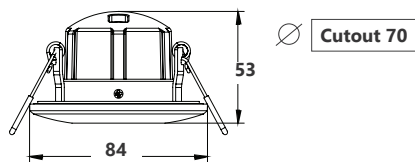

DETAILS

Warranty	5 years
Applications	Interior
Certification(s)	UKCA, CE, RoHS
Colour Finish	White as standard Chrome Brushed Chrome Black optional
Luminaire Fixing	Recessed
Construction Material	Aluminium
Diffuser Type	Polycarbonate
Unit Weight (kg)	0.20
Voltage Range	AC220-240V
Power Factor	>0.90
Inrush Current	<30A
Running Current	DC71mA
Protection Class IEC	Class II
Wattage	6W
Lumens	602
Efficacy	~100 Lm/W
Operating Temperature	-20°C to +45°C
Beam Angle	60°
Kelvin	3000K 4000K
Operating Hours	>50000
CRI	>80 Ra
IP Rating	IP65 fascia / IP54 back
IK Rating	IK08
Macadam Ellipse	≤6 sdc
L70 B50	50,000 hours
L80 B50	30,000 hours
L90 B50	15,000 hours